HIGH DEFINITION AUDIO


ENHANCE YOUR BOARD MEETINGS WITH CLARITY BEYOND COMPARISON

Clarity is a crucial element in communicating at the board level. Now Chorus Call can help you take your meetings held by conference call to a new level with the latest in audio technology.

Not only will call participants using HD phones enjoy the better quality High Definition (HD) audio, but anyone participating on a smart phone can benefit as well.

Like the jump from black and white to colour television, once you experience the rich acoustics of HD audio you won't be satisfied with anything else.

Talk to your Chorus Call Account Representative to find out how to offer HD audio on your next call.

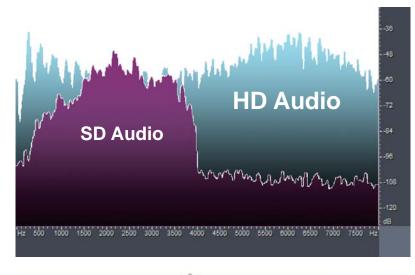





REDUCE AUDIO FATIGUE

With HD audio your particpants will hear a much wider audio spectrum otherwise absent from narrow-band conferencing. This richer sound alleviates fatigue on the ear, allowing call participants to focus on what is being said instead of straining to hear what they may be missing.

DECIPHER ACCENTS

In the global marketplace there are many types of voices — each possessing a unique pitch, strength and articulation. Using HD audio will benefit meeting participants when they are struggling to understand an accent that is different from their own.

IMPROVE COMPREHENSION

Did she say "million" or "billion"? With HD audio conferencing the chances of being misunderstood are reduced.

For more information Call: 1-800-319-3929 +1-604-638-5300 Email: Canada@choruscall.com

Canada
Japan
New Zealand
United States







High Definition Audio Conferencing & Webcasting

WHAT YOU NEED TO GET STARTED:

A VoIP telephone or HD-enabled soft phone, such as:

- Polycom SoundPoint IP 650 SIP
- Polycom SoundPoint IP 6000 SIP
- Polycom Soundstation IP 7000
- Cisco 790X
- HD soft phone examples: X-Lite, 3CX, PhonerLite, PJSIP, and Sipper

TECHNICAL DETAILS FOR YOUR IT DEPARTMENT:

When configuring physical VoIP phones, it is important to ensure that:

- The HD phone is registered by populating the field labeled as "SIP Proxy Server" or "SIP Registrar IP Address" with the appropriate IP address and port 5060
- The transport type is set to UDP
- Both the UDP and TCP port 5060 are open bi-directionally in the network.

